



What's C-201W

These instruments should be combined with O₂ sensor then control cell temperature and convert cell EMF to O₂ value for display and signal output. This is the special model for abroad that simplified the specification and made reasonable price.

Features

- ⊙ Easy to handle.
- ⊙ Readable large display.
- ⊙ A lot of functions.
(Back light, interactive display for setting and calibration, Output hold, Remote calibration etc.)
- ⊙ Serial communication function (RS232C) is normally equipped.


Specification

		MODEL : C-201W
Dimensions		215W × 292H × 95D
Weight		Approx. 2500g
Power		85~264VAC
Display	Upper	4 figures LED
	Lower	LCD
Display Ranges	R1 : %	0~99.99%
	R2 : ppm	0~9999ppm
Output ※1	DCA	D. C. 4~20mADC/0-1VDC/0-5VDC/0-10VDC (select one of them)
Communication		RS232C
Range Select		Manual / Auto / Remote
Alarm		Output : Hi/Lo, Hi/H · Hi, Lo/L · Lo Failure : Sensor temp. abnormal (Either of open collectors)
Other functions		Cell EMF and/or Cell temp. are shown on lower display. Range answer-back, hold, one-touch calibration equipped.


※1 It is possible to set arbitrarily within the range of the above-mentioned.

※2 For the improvement, the specification and design may be changed without prior notice.

Introduction drawing

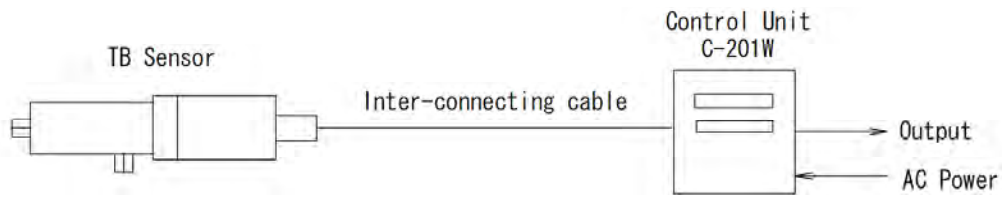

Dimensions

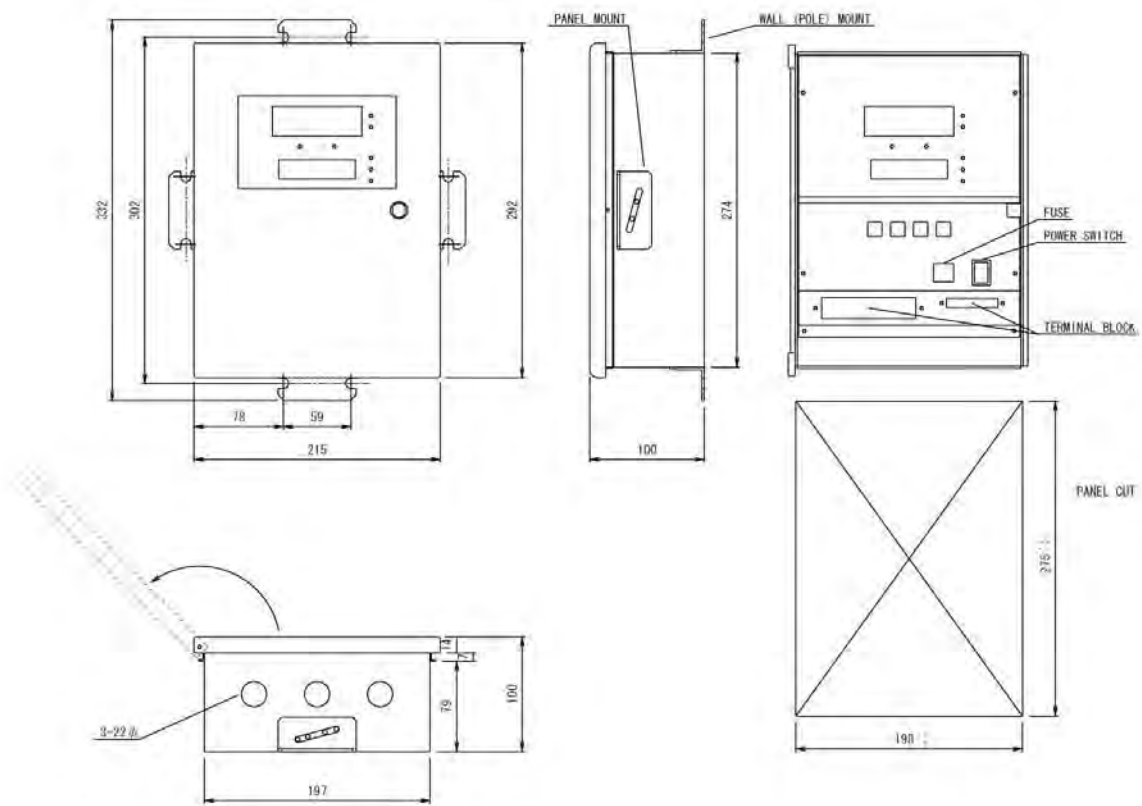

TASHIKA BOEKI SHOKAI K.K.

1-12, Kaiyo-cho, Ashiya, 659-0035, JAPAN

Tel: + 81-797-23-9035 Fax: + 81-797-23-2105

e-mail: sales@tashika.co.jp URL: www.tashika.co.jp

Inquiry